

DS-230

12th Generation Intel® Core™ i5 SDM Player

Preliminary



Introduction

The DS-230 design is based on the Intel SDM specification and is powered by 12th Gen. Intel® Core™ processors. DS-230 delivers 4K UHD output and smooth content streaming via a card edge connector, while maintaining high-energy efficiency. DS-230 allows slot-in integration that reduces space requirements and lowers deployment and field maintenance costs. It also features built-in I/O such as HDMI, DP, USB 3.1, and a single LAN (RJ-45). DS-230 enables media playback and display and is ideal for all-in-one signage applications with space constraints.

Features

- Intel SDM-L (Smart Display Module - Large) form factor
- 8th Generation Intel® Core™ i5 1235U
- Dual channel DDR4-3200 SO-DIMM, up to 32 GB
- 3 independent displays: Golden Finger (HDMI 2.0, DP1.4a), Front Bracket (DP1.4a)
- Supports Real 4K resolution
- Supports Microsoft Windows 10 with proven compatibility
- Easy installation and maintenance with Intel® SDM slot-in design


WISE-PaaS/ DeviceOn WISE-PaaS/SignageCMS McAfee Acronis

Specifications

Form Factor	SDM	L (Large)
Processor System	CPU	Intel i5 1235U
	TDP	15W
	BIOS	AMI uEFI 128 Mbit
Memory	Technology	2 x DDR4 3200MHz 260-pin SODIMM
	Max. Capacity	32GB (16GB per SODIMM)
Display	Controller	CPU integrated
	Graphic Engine	Intel® Iris® Xe
	Video format	H.265/HEVC, H.264/AVC, MPEG2, VC1/WMV9, VP8, JPEG/MJPEG, VP9
	Output	HDMI 2.0 & DP1.4a from golden finger, DP1.4a from front bracket
	Max. Resolution	3840 x 2160 @ 60Hz
Storage	SATA/NVMe	M.2 2242 M Key
I/O Interface	Golden Finger	PCIe x8. The pin define follows Intel® SDM specifications
	DP 1.4a	1
	USB	2 x USB3.1 Gen.2
	LAN(RJ-45)	1
	M.2	1 x 2230 (E key) for WiFi module
	SDM I/O Interface	USB2.0 x1, HDMI 2.0 x1, Display Port 1.4a x1, RS232 x1, 12V DC-In
Power Requirement	Management	ACPI 3.0
	Power Consumption	Max: 12V@5.5A
	Input Type	ATX/AT Mode
	Input Voltage	12V DC-In (± 5%, Via Golden Finger)
Watchdog Timer	Output	Interrupt, system reset
	Interval	Programmable 1~255sec. by SUSI4.0 API
Physical Characteristics	Dimensions (W x H x D)	175 x 100 x 20 (SDM-L compliant)
	Weight	1 Kg
Environment	Operating Temperature	0 ~ 55 °C @ Natural Convection Chamber
	Thermal Solution	Active
	Relative Humidity	95% @ 40 °C (non-condensing), Operating
Software Development Kit	Operating System	Windows 10 (64bit)
	Signage Software	WISE-PaaS/RMM, WISE-PAAS/SignageCMS, WISE-PaaS/EdgeSense
Certification	Electromagnetic	CE/FCC, CB, UKCA, VCCI, vPro


Dimensions

Unit: mm

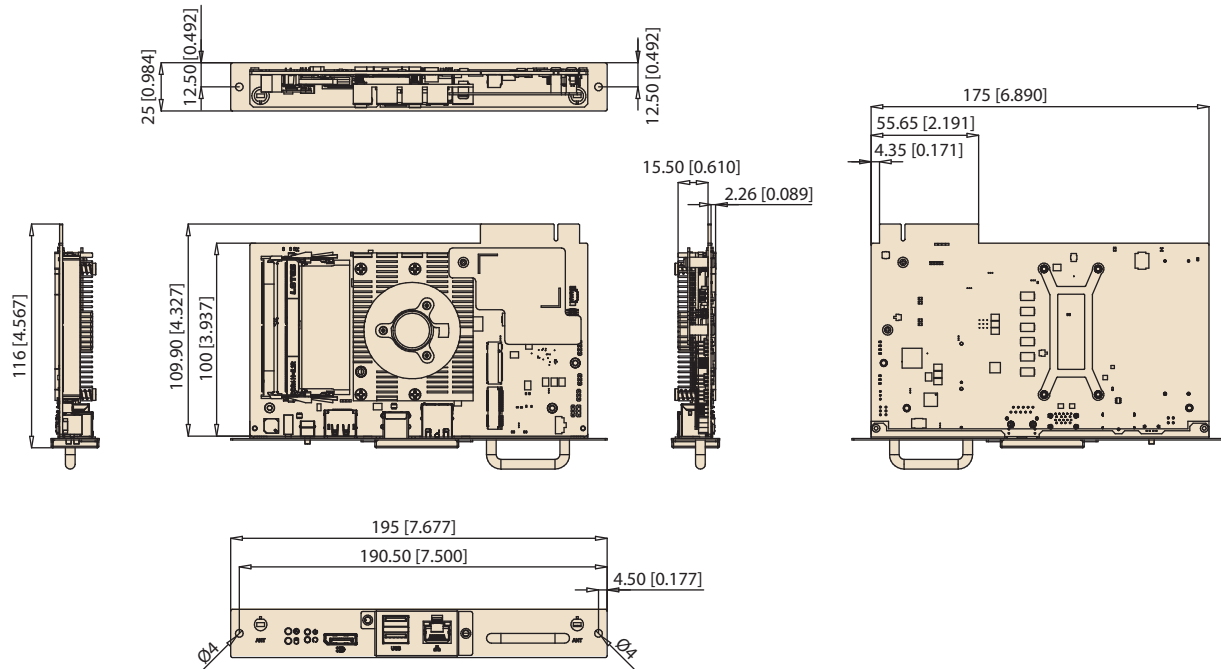

External I/O

Front

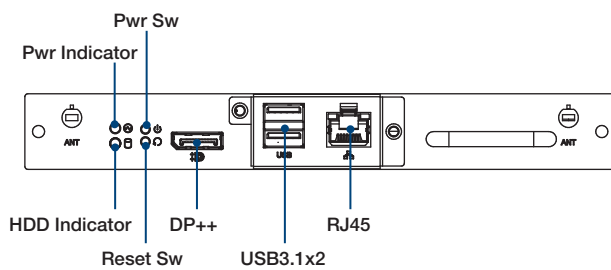

Ordering Information

Part Number	Description

Optional Items

Part Number	Description
EWM-W165M202E	Wifi/BT module, 802.11 ac/a/b/g/n, BT 4.1

Embedded OS

Part Number	Description

Packing List

Part Number	Description
	1 x DS-230